


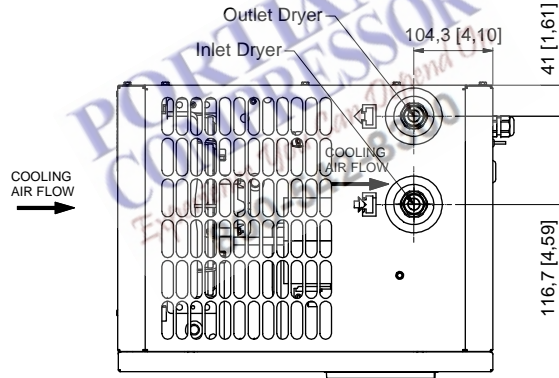

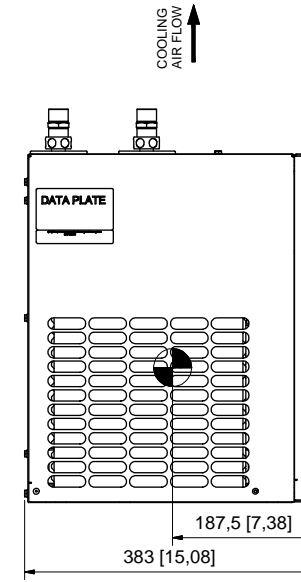
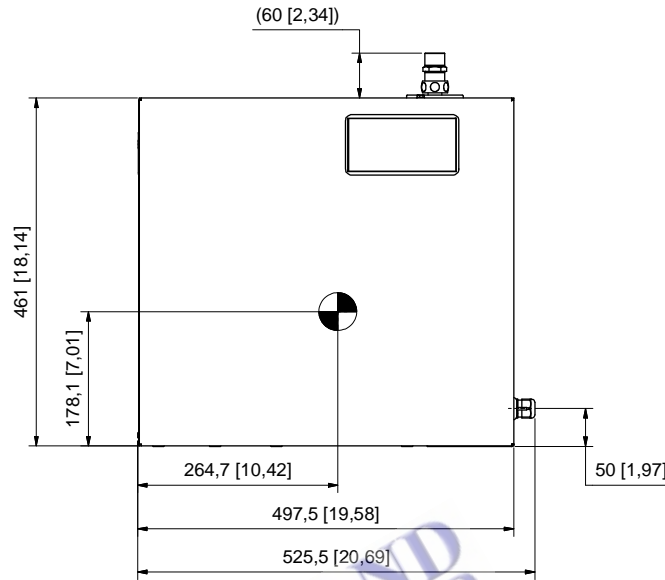


All materials supplied are in compliance with the requirements of the List of Prohibited Substances

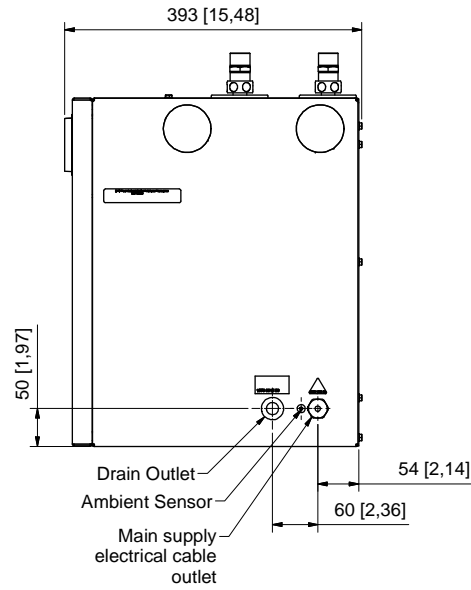

02

Type dryer	Air Connection for 50hz dryer (male thread)	Air Connection for 60hz dryer (male thread)	Weight:
ES 5	ISO7 - R3/4"	NPT 3/4"	27 kg (52,9 lb)
ES10	ISO7 - R3/4"	NPT 3/4"	27 kg (52,9 lb)
ES15	ISO7 - R3/4"	NPT 3/4"	32 kg (70,5 lb)
ES20	ISO7 - R3/4"	NPT 3/4"	34 kg (75 lb)
ES25	ISO7 - R3/4"	NPT 3/4"	34 kg (75 lb)
ES30	ISO7 - R3/4"	NPT 3/4"	34 kg (75 lb)



Dimensions: mm (in)

Tolerances, if not indicated, according to:							
Name	DIMENS. DRWG		ES5-30		Confidentiality Class acc. to 1102 K		
Material	NOT APPLICABLE		Internal		INV		
Treatment	NOT APPLICABLE		Internal		CAI		
Scale	1:5	Family	Compare		Drawing from		
Drawn by	JAN	Blank nr.	Replaces		CAI		
STATUS	A2	Des. checked.	Prod. checked.	Approved.	Date	14/03/2006	
Parent 3D model	Ed. Version 3D	9827993900	02.04	Approved Internal	9827993900		

CONFIDENTIAL: This document is property of Atlas Copco AB and shall not without our permission be altered, copied, used for manufacturing or communication to any other person or company.

02	Updated. CID.27855, DN21054107.	18-02-21	asavio
Ed	Position	Modified from	Date Intr./Appd.

9827993900	02.04
Parent 3D model	Ed. Version 3D

Sheet 1 / 1