




IRON SERIES


RCP-C 5-20 hp

Chicago Pneumatic's Iron Series Compressors feature all cast iron design pumps. Models include simplex compressor packages from 5-10 hp and duplex compressors at 20 hp. Choose from our standard or premium (full featured) models. All Iron Series Compressors come with the 2 Year CP Secure Warranty with no additional purchase required.

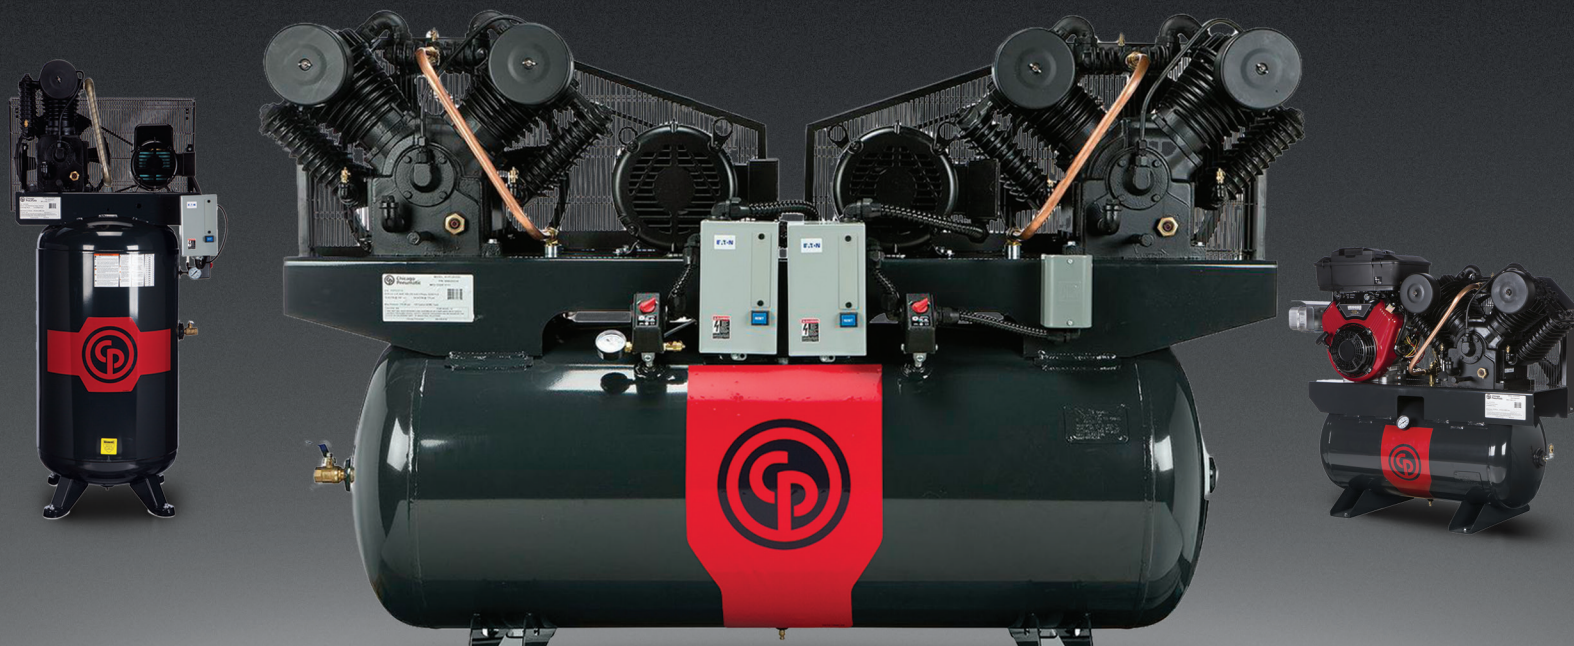

Standard Features:

- Cast iron construction
- Automotive style rod bearings and wrist pins
- Concentric ring valves
- Splash lubricated
- Finned coolers

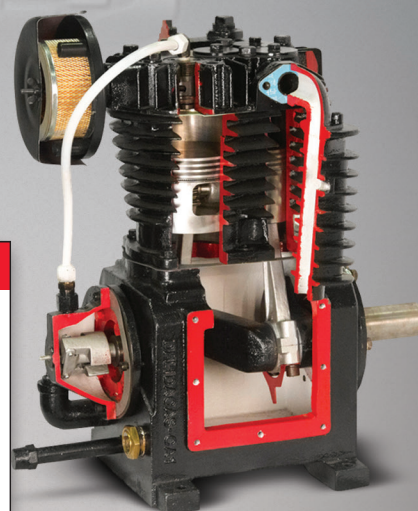

RCP-C Series

People. Passion. Performance.

RCP Iron Series

Two Stage Electric Simplex										
Model	Amp Draw	hp	Tank gal	Voltage/Phase	cfm @ 100 psi	Max. psi	Weight (lb)	L (in)	W (in)	H (in)
RCP-C581VS	22	5	80V	230/1	18	175	580	24	34	72
RCP-C583VS	13.2	5	80V	230/3	18	175	580	24	34	72
RCP-C583VS4	6.6	5	80V	460/3	18	175	580	24	34	72
RCP-C7581VS	29	7.5	80V	230/1	23	175	622	24	36	72
RCP-C7583VS	17.2	7.5	80V	230/3	23	175	622	24	36	72
RCP-C7583VS4	8.6	7.5	80V	460/3	23	175	622	24	36	72
RCP-C7581VSC2	30	7.5	80V	230/1	27	175	694	26	40	70
RCP-C7583VSC2	19.6	7.5	80V	230/3	27	175	694	26	40	70
RCP-C7583VSC24	6.6	7.5	80V	460/3	27	175	694	26	40	70
RCP-C10123HS	25	10	120H	230/3	35	175	728	27	70	49
RCP-C10123HS4	12.5	10	120H	460/3	35	175	728	27	70	49
RCP-C10123VS	25	10	120V	230/3	35	175	765	30	41	73
RCP-C10123VS4	12.5	10	120V	460/3	35	175	765	30	41	73
PREMIUM MODELS										
RCP-C581V	22	5	80V	230/1	18	175	580	24	34	72
RCP-C583V	13.2	5	80V	230/3	18	175	580	24	34	72
RCP-C583V4	6.6	5	80V	460/3	18	175	580	24	34	72
RCP-C7581V	29	7.5	80V	230/1	23	175	622	24	36	72
RCP-C7583V	17.2	7.5	80V	230/3	23	175	622	24	36	72
RCP-C7583V4	8.6	7.5	80V	460/3	23	175	622	24	36	72
RCP-C7581VC2	30	7.5	80V	230/1	27	175	694	26	40	70
RCP-C7583VC2	19.6	7.5	80V	230/3	27	175	694	26	40	70
RCP-C7583VC24	6.6	7.5	80V	460/3	27	175	694	26	40	70
RCP-C10123H	25	10	120H	230/3	35	175	728	27	70	49
RCP-C10123H4	12.5	10	120H	460/3	35	175	728	27	70	49
RCP-C10123V	25	10	120V	230/3	35	175	765	30	41	73
RCP-C10123V4	12.5	10	120V	460/3	35	175	765	30	41	73
DUPLEX MODELS										
RCP-C10121D	44	10 (2 x 5)	120H	230/1	36	175	1120	25	78	52
RCP-C10123D	26.4	10 (2 x 5)	120H	230/3	36	175	1120	25	78	52
RCP-C10123D4	13.2	10 (2 x 5)	120H	460/3	36	175	1120	25	78	52
RCP-C15121D	58	15 (2 x 7.5)	120H	230/1	46	175	1138	25	78	52
RCP-C15123D	34.4	15 (2 x 7.5)	120H	230/3	46	175	1138	25	78	52
RCP-C15123D4	17.2	15 (2 x 7.5)	120H	460/3	46	175	1138	25	78	52
RCP-C20123D	50	20 (2x10)	120H	230/3	70	175	1309	25	78	50
RCP-C20123D4	25	20 (2x10)	120H	460/3	70	175	1309	25	78	50
RCP-C20203D	50	20 (2x10)	200H	230/3	70	175	1646	30	79	58
RCP-C20203D4	25	20 (2x10)	200H	460/3	70	175	1646	30	79	58
GASOLINE MODELS										
Model	Amp Draw	hp	Tank gal	Engine	cfm @ 100 psi	Max. psi	Weight (lb)	L (in)	W (in)	H (in)
RCP-C1130G	N/A	11	30H	Honda	24	175	509	22	43	42
RCP-C1330G	N/A	13	30H	Honda	26.4	175	519	22	43	42
RCP-C1430G	N/A	14	30H	Kohlor	26.4	175	526	22	44	42
RCP-C1630G	N/A	16	30H	Briggs Vanguard	32	175	605	21	48	44

*As in accordance with NEC

OPTIONS

Low Oil Level Switch (LOLS) (5-10 hp)

Low Oil Level Switch (LOLS) (Duplex)

Auto Drain - Pressure Actuated

Auto Drain - Electric Timed

Belt Guard Aftercooler 5-7.5 hp

Belt Guard Aftercooler 10 hp

Belt Guard Aftercooler (Duplex)

Standard Features:

- Start-Stop Pressure Switch Control
- Tank: both CRN & ASME certified and National Board Registered w/ASME certified safety valve on tanks and pumps
- Fully Enclosed Belt Guard, Discharge Valve, Magnetic Starter and Alternator

Premium Models also Include:

- Low Oil Level Switch, Automatic Tank Drain, and Belt Guard Aftercooler



Two Stage Reciprocating Warranty - 2 Years

www.cp.com

© 2023 Chicago Pneumatic. All Rights Reserved.
 Content is subject to change without notice.
 01/23 003

For more information,
 Call: United States:
800.542.8300
 or email cp.sales@cp.com

